

HCP 1000

FIXED PULVERIZER



DESIGNED FOR 20
TO 40 TONS CARRIERS

RECYCLING
AND DEMOLITION

SECONDARY DEMOLITION,
SEPARATION OF SCRAP
AND CONCRETE

BENEFITS

- **Robust, solid and durable:** frame made of 400 HB reinforced steel, equipped with oversized hydraulic components.
- **Cylinder with speed valve:** increased productivity and energy savings thanks to reduced cycle times.
- **Quick and easy maintenance:** removable wear plates, refillable 600 HB welding teeth and field-replaceable blades.

FIXED PULVERIZER BORN TO CRUSH

HCP 1000

ATTACHMENT SPECS

WEIGHT - WITHOUT ADAPTER PLATE (KG - LB)	2,360	5,203
JAWS CLOSING FORCE (T)	125	
BLADE CLOSING FORCE (T)	225	

HYDRAULIC SPECS

OIL FLOW (MIN - MAX, L/MIN - GPM)	180 - 260	47.5 - 68.6
OPENING & CLOSING PRESSURE (MAX, BAR - PSI)	350	5,075

CARRIER SPECS

WEIGHT (MIN - MAX, T)	20 - 40
-----------------------	---------



DIMENSIONS (MM - IN)

A	2,375	93.5
B	1,000	39.3
C (OPEN - SHUT)	1,605 - 1,260	63.1 - 49.6
D	563	22.1
E	983	38.7
F	310	12.2
G	620	24.4

CONSUMABLES

PRODUCT NUMBER

SPARE BLADES	contact us
BASIC MAINTENANCE KIT	contact us
ADVANCED MAINTENANCE KIT	contact us

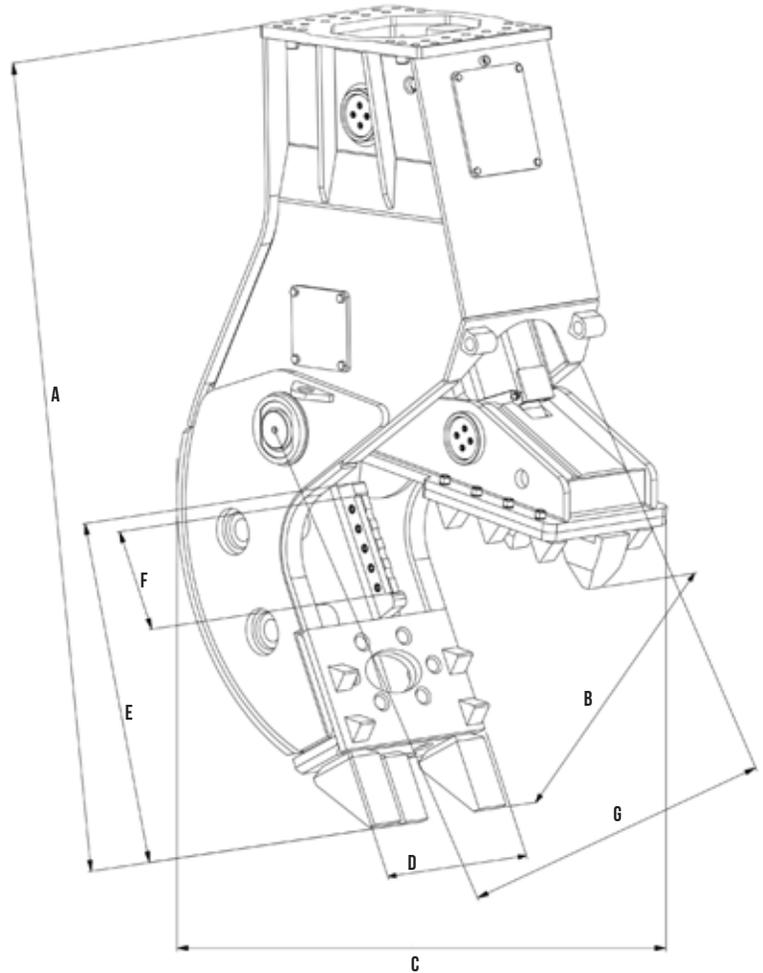

The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2024 Montabert. All rights reserved.

montabert.com
tramac.com

